




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>B62D 5/04, H02K 11/04</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 98/26972</b> <b>(43) International Publication Date:</b> 25 June 1998 (25.06.98)
<b>(21) International Application Number:</b> PCT/GB97/03475 <b>(22) International Filing Date:</b> 18 December 1997 (18.12.97)  <b>(30) Priority Data:</b> 9626298.5                      19 December 1996 (19.12.96)      GB  <b>(71) Applicant (for all designated States except US):</b> LUCAS INDUSTRIES PUBLIC LIMITED COMPANY [GB/GB]; Stratford Road, Solihull, West Midlands B90 4LA (GB).  <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> PENKETH, David, Michael [GB/GB]; 24 Manor Road, Streetly, Sutton Coldfield, West Midlands B74 3NG (GB).  <b>(74) Agent:</b> BARKER, BRETTEL & DUNCAN; 138 Hagley Road, Edgbaston, Birmingham B16 9PW (GB).		<b>(81) Designated States:</b> BR, JP, KR, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>

**(54) Title:** IMPROVEMENTS RELATING TO POWER-ASSISTED STEERING ASSEMBLIES**(57) Abstract**

A housing assembly for an electrical device (such as an electronic circuit) is disclosed in which a support member is provided in a compartment to physically divide a componentry sensitive to such radiation. In a preferred embodiment, an electric power-assisted steering system is disclosed of the kind in which an electric motor (12) is connected through a gearbox to an output shaft operatively connected to a steering column of the vehicle and in which a one-piece housing (1) is provided which defines two discrete compartments (2, 3). A first compartment (3) is adapted to house the motor and the gearbox, and a second compartment (2) is adapted to house a motor control circuit and a motor drive circuit, a support member (21) being adapted to provide a physical barrier between the two circuits. The one-piece housing (1) is advantageous in that it reduces the number of potential openings through which electromagnetic radiation may pass compared with providing multiple housings.

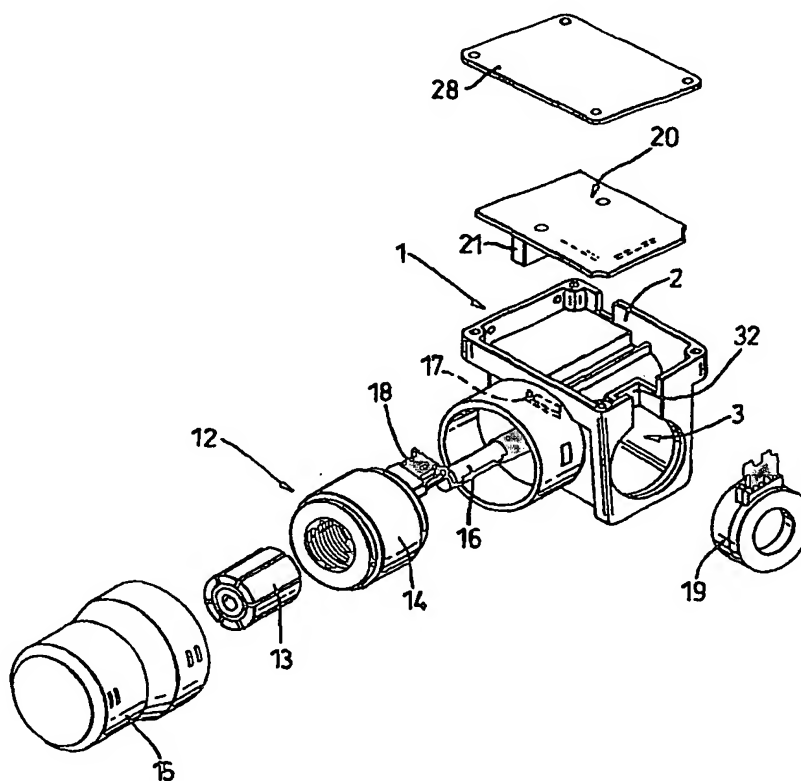

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## IMPROVEMENTS RELATING TO POWER-ASSISTED STEERING ASSEMBLIES

The invention relates to improvements in housings for electrical  
5 devices, and in particular, but not exclusively, electric power-assisted  
steering systems for vehicles of the kind comprising an electric motor  
connected through a gearbox to an output shaft operatively connected to a  
steering column of the vehicle. In particular, the invention relates to  
reduction in the susceptibility of an electrical system to electromagnetic  
10 noise.

It is well known to provide electrical systems which incorporate  
both high power electronic and low power electronic components in a  
single design. For efficiency of space, it is often desirable to incorporate  
15 both kinds of components into a single housing unit but this can create  
problems due to electromagnetic interference. Hence, it is common  
practice to split the high and low power devices into separate housings.

For example, in electric power assisted steering systems of the kind  
20 set forth, the electric motor is used to assist a driver of the vehicle in  
turning the steering column, by applying an assistance torque of the same  
sense as the torque applied by the driver, which makes it easier to turn  
the steering wheel, for example during parking. The motor is controlled  
by motor control circuitry and drive circuitry. The control circuitry is  
25 typically connected to a torque sensor associated with the steering column  
and adapted to provide a signal indicative of the torque demand by the  
driver. The motor drive circuitry is adapted to switch the motor drive  
currents between, for example, different phases in the motor under the  
control of the motor control circuitry. It typically comprises a plurality  
30 of high power transistors connected in a bridge as it must handle the

relatively high currents demanded by the motor. The transistors are switched under the control of the control circuitry.

Electric motors are known to be relatively strong sources of electromagnetic radiation which can cause interference problems with other electronic circuitry provided in the motor vehicle and, in particular with the control circuitry in the steering system. Furthermore, because of the limited choice of positions in which the steering system can be mounted within the increasingly cramped confines of a vehicle, it is often exposed to many other sources of electromagnetic radiation. External sources of radiation, such as overhead power lines, can also produce electromagnetic radiation which can cause interference. In a safety critical application such as a power-assisted steering system, it is important to provide a high level of shielding from this electromagnetic radiation to minimise the susceptibility of the electronic control and drive circuitry from interference.

It is already known to overcome the problem of electromagnetic interference by providing the drive and control circuitry inside separate conductive casings which are bolted onto a main housing body which contains the gearbox. Another casing is provided which houses the motor. The purpose of providing the separate casings is to isolate the electronic circuitry from the motor and gearbox. However, each casing requires a separate cover or other opening to allow installation and maintenance. These openings provide potential points of leakage and entrance of radiation through the various associated seals.

According to one aspect, the invention provides a housing assembly for an electrical device defining a compartment adapted to contain a first electrical component which emits electromagnetic radiation and a second

electrical component which is sensitive to the radiation and a support member adapted to provide a physical barrier between the two devices.

Preferably, the compartment is closed by a lid member to seal the  
5; inside of the compartment substantially from the outside of the compartment.

Preferably the housing is a one-piece housing.

10 The electrical devices may comprise a drive circuit and a control circuit for an electric motor. The motor may comprise a part of an electrical power assisted steering system.

An advantage of physically separating the two electrical devices or  
15 circuits is that the electromagnetic radiation emitted by one of the circuit is substantially shielded from the other device or circuit, reducing noise.

It will be understood that the term electrical device should be given a broad interpretation to include, for example, an electronic circuit or  
20 other assembly of discrete electrical and electronic components or even a combination of electrical/electronic components and a primarily mechanical device such as an electrical motor.

The housing may further comprise a second compartment which is  
25 part of a one-piece housing and is adapted to contain a third electrical component that is electrically connected to one of the electrical components in the first compartment. The third component may comprise a motor.

According to a second aspect of our invention, an electric power-assisted steering system is provided of the kind in which an electric motor is connected through a gearbox to an output shaft operatively connected to a steering column for a vehicle, characterised in that a one  
5 piece housing in accordance with the first aspect is provided to define at least two discrete compartments, a first one of the compartments being adapted to house the motor and the gearbox, and a second one of the compartments being adapted to house a motor control circuit and a motor drive circuit, a support member being adapted to provide a physical  
10 barrier between the drive circuit and the control circuit.

An advantage of a one-piece housing is that there are less openings which may provide a passage for electromagnetic radiation between the two compartments, eliminating the rigorous requirements for sealing of  
15 openings. The benefits of this invention extend to systems other than electrical power steering systems where isolation is advantageous.

Conveniently, the compartment containing the support member is closed by a lid portion.  
20

The support member may be adapted to form a seal with said one-piece housing to prevent electromagnetic radiation transmitting from one side of the support member to the other side of the support member and visa-versa.  
25

Preferably, the support member may be adapted to be mounted onto a printed circuit board (PCB) which carries at least one of the drive circuitry and the control circuitry or both. This is advantageous as it allows the support member to provide additional structural reinforcement  
30 to the PCB.

Most preferably, the support member is adapted to act as a heatsink. The support member may support parts of the drive circuitry e.g. the bridge transistors and or a regulator. This can help to eliminate the need for cooling vents in the housing or lid portion. In this case the support member may be formed from any heat conducting material where it is to act as a heatsink. Metal may be used as this is a good conductor of heat. In one preferred embodiment, the support member may be formed as an integral part of a one-piece housing but be made from a different material to the housing (i.e. a casting with an insert).

By providing a support member and one-piece housing in accordance with the present invention, the drive circuitry for the motor (which carries a relatively high current) can be isolated from the control circuitry ( which carries only low power signals). This helps to prevent electromagnetic radiation emitted by the high power components causing interference in the low power components.

Of course, it will be apparent to the skilled man that the support member may be formed as an integral part of the one-piece housing and not as a separate barrier. If it is an integral part, it could be formed from the same material as the remainder of the housing, or from a different material.

The support member may be adapted to be bolted onto the housing through the PCB so as to support the PCB in place. Additionally, the portion of the one-piece housing containing the gearbox and the motor may also be divided into two chambers, one containing the gearbox, the other the motor.

An embodiment of the invention will now be described, by way of example only, with reference to the accompanying drawings of which:

5       **Figure 1** is an exploded view of an electric power-assisted steering system in accordance with the present invention;

**Figure 2** is a first perspective view of the one piece housing;

10       **Figure 3** is a second perspective view (from a different angle) of the housing shown in **Figure 2**;

15       **Figure 4** is a view along the axis of the motor rotor of the motor housing with the control and drive circuitry and support member assembled in position; and

**Figure 5(a), (b) and (c)** are views of the support member and arrangement of the electrical motor drive components upon the support member.

20       **Figure 1** shows an exploded view of an electric power assisted steering system.

25       A one-piece housing 1 is provided which accommodates, in one self contained unit, the various component parts of the power steering system, including a motor 12, a gearbox (not shown), a torque sensor 19 and the motor drive circuitry and control circuitry.

30       As best shown in **Figures 2 and 3**, the housing 1 is of a one piece construction and in the embodiment shown is cast from metal. The housing 1 defines two separate compartments 2,3, one disposed above the



other. The lower component 3 has an upper internal face (not shown) and lower external face (not shown) and a first 4a,4b and second pair 5a,5b of orthogonal external walls. The upper compartment has a lower internal face 6 which is formed from the same part of the housing which carries the upper face of the lower compartment, and two pairs of orthogonal walls, 8a,8b,7a,7b. However unlike the lower compartment 3, the upper compartment 2 has no internal upper face. Instead, a removable lid 28 is provided.

10 A substantially circular opening 9a,9b is provided in each of the first pair of orthogonal walls 4a,4b of the lower compartment of the housing. A steering column (not shown) of a vehicle is adapted to extend sealingly into the lower compartment 3 through these two openings 9a,9b. A further opening 10 is provided in one of the second pair of orthogonal walls 5a,5b of the lower compartment and is surrounded by a cylindrical shroud 11 which projects axially away from the opening 10 outside of the lower compartment 3. The motor assembly 12 which comprises a rotor 13 and a stator 14 is mounted inside the shroud 11. This eliminates the need for a separate motor casing.

20

An end cap 15 is placed over the motor assembly 12 to form a seal at the end of the shroud 11 distal from the main housing 1. With the steering column and the motor in place, the inside of the lower compartment 3 is sealed from the outside environment.

25

The motor rotor 13 is secured to a spindle 16 which extends through the motor stator and projects into the lower compartment 3. The motor rotor 13 is adapted to drive the steering column through a worm gear and worm wheel which defines a gearset (not shown). A small opening is provided inside the shroud 11 extending into the upper

30

compartment 2 to allow electrical connections from the motor assembly 12 to pass through into the upper compartment 2. The opening 17 also allows electrical connections 18 from a motor rotor position sensor (not shown) provided as a part of the motor assembly to pass through.

5

A recess is formed around one of the openings 9a in the first pair of orthogonal walls 4a,4b of the lower compartment 2. A torque sensor 19 is provided inside this recess in the form of an annular assembly which is adapted to fit around a portion of the steering column shaft where it extends through the opening 9a. Electrical connections 21 to and from the torque sensor 19 are adapted to extend through an opening 32 provided in the wall of the upper compartment 2 directly above the opening 9a. The torque sensor 19 is adapted to provide an output signal indicative of the torque demand input by the driver of the vehicle to the steering column. This output signal is connected to a motor control circuitry which is adapted to control the motor in response to motor position signals, steering column torque signals and vehicle speed signals etc. The control circuitry provides a control signal to the motor drive circuitry which operates the motor to apply a torque to the steering column so as to assist the driver.

The motor drive circuitry and control circuitry is disposed in the upper compartment 2 as shown in Figure 4. This is advantageous as the electronic circuitry is thereby well shielded from the electric motor 12 which is sealed within the lower compartment 3. Furthermore, when the lid 28 is secured on the upper face of the side walls 7a,7b,8a,8b of the upper compartment 2, the electronic circuitry is also well protected from any external electromagnetic energy sources.

The motor drive circuitry and motor control circuitry is mounted onto a printed circuit board 20. For ease of construction, the circuitry is mounted onto the PCB 20 prior to installing the electronic circuitry within the upper compartment 2. The various electronic components are separated on the PCB so that the high power components (such as the motor drive circuitry transistors) are disposed on one half of the circuit board. The more sensitive electronic components, such as the motor control circuitry, are disposed on the other half of the circuit board.

10 A metal (or other material) support member 21 is fixed on to one side of the circuit board across the centre of the board so as to separate physically the high power and lower power components. The support member 21 provides additional rigidity to the circuit board 20, and also performs the function of a heatsink for the motor drive transistors 25 of the drive circuitry, as shown in Figure 5. Additionally, the support member 21 can also act as a heatsink for any other kind of device which requires heatsinking, for example, a regulator 26 as shown in Figures 5(a) and 5(b).

20 When the printed circuit board 20 is mounted in the upper compartment 2 to which the lid 28 is secured, the support member 21 forms a seal with the lower face 6 and sides 7a,7b,8a,8b of the upper compartment 2, effectively dividing the compartment 2 into sub-compartments 22,23 which are electromagnetically shielded from one another.

25

It has been found that this construction provides good electromagnetic compatibility (EMC) by shielding the components which may be susceptible to noise from the high power circuitry and the electric

motor. Furthermore, this construction results in a minimum number of seals which are a potential source of leakage of electromagnetic radiation.

Where the support member 21 contacts the one-piece housing 1, heat can be conducted away from the electronic components into the housing itself. This can be further improved by providing fins (not shown) on the outside of the housing 1 to help radiate heat into the surrounding air. It has been found that sufficient heat can be dissipated in practice for the assembly to function without the need for providing external vents, for the upper compartment housing which would compromise the electromagnetic shielding of the circuitry.

It will be readily understood that the present invention lies in the alleviation of the effects of electromagnetic radiation on the electronic circuitry in an electric power assisted steering system by reducing the number of seals and other potential sources of leakage in the housing design. Furthermore, the inventors have appreciated that significant improvement can be made by physically separating the sensitive control circuitry from the high power drive circuitry and the relatively noisy electric motor.

Of course, it will be apparent to the skilled man that the present invention is not limited to electrical power assisted steering assemblies, but has for wider application where it is required to isolate part of an electrical device or electronic circuit from electromagnetic noise emitted from the part of the circuit.

## CLAIMS

1. A housing assembly (1) for at least an electrical device which emits electromagnetic radiation defining a compartment (2) adapted to contain a first electrical component and a second electrical component sensitive to the electromagnetic radiation, and a support member (21) adapted to provide a physical barrier between the two components.
2. A housing assembly (1) for an electrical device according to claim 1, characterised in that the compartment is closed by a lid portion.
3. A housing assembly (1) for an electrical device according to claim 1 or claim 2, characterised in that the support member (21) is adapted to form a seal with said housing (1) substantially to prevent electromagnetic radiation transmitting from one side of the support member (21) to the other side of the support member and visa-versa.
4. A housing assembly (1) for an electrical device according to any preceding claim, characterised in that the support member (21) is adapted to be mounted onto a printed circuit board (20) which carries at least one of the first electrical adapted to emit electromagnetic radiation and the second electrical component which is sensitive to said radiation.
5. A housing assembly for an electrical device according to any preceding claim, characterised in that the support member (21) is adapted to act as a heat sink.

6. A housing assembly for an electrical device according to any preceding claim, characterised in that the support member (21) supports parts of the first electrical circuit.

5

7. A housing assembly for an electrical device according to any preceding claim, characterised in that the support member (21) is made of metal.

10 8. A housing assembly for an electrical device according to any preceding claim, characterised in that the support member (21) is formed as an integral part of the one-piece housing (1).

9. A housing assembly for an electrical device according to any one of  
15 claims 1 to 7, characterised in that the support member (21) is adapted to be mounted onto the housing (1) through the printed circuit board (20) so as to substantially support the printed circuit board in place.

10. A housing assembly according to any preceding claim which  
20 comprises a one-piece housing defining a first compartment and a second compartment, in which the first compartment contains the support member and the first and second electrical components, and the second compartment contains a third electrical component which is electrically connected to one of the electrical components in the first compartment.

25

11. A housing assembly for an electrical device according to any preceding claim comprising a housing for an electric power-assisted steering system of the kind in which an electric motor (12) is connected

through a gearbox to an output shaft operatively connected to a steering column for a vehicle, characterised in that the housing is a one piece housing (1) which defines at least two discrete compartments (2, 3), a first one of the compartments (3) being adapted to house the motor and the gearbox, and a second one of the compartments (2) being adapted to house a motor control circuit and a motor drive circuit, the support member (21) being adapted to provide a physical barrier between the drive circuit and the control circuit.

12. A housing assembly according to claim 11, characterised in that the second compartment (2) of the one-piece housing containing the gearbox and the motor is divided into two chambers, a first chamber containing the gearbox and a second container containing the motor.

13. A housing for an electrical device according to any preceding claim, characterised in that the housing comprises a one-piece casting.

14. A housing for an electrical device according to any preceding claim in which the housing and support member comprise an integral component with the support member being made as an insert in a casting which forms the housing.

1/4



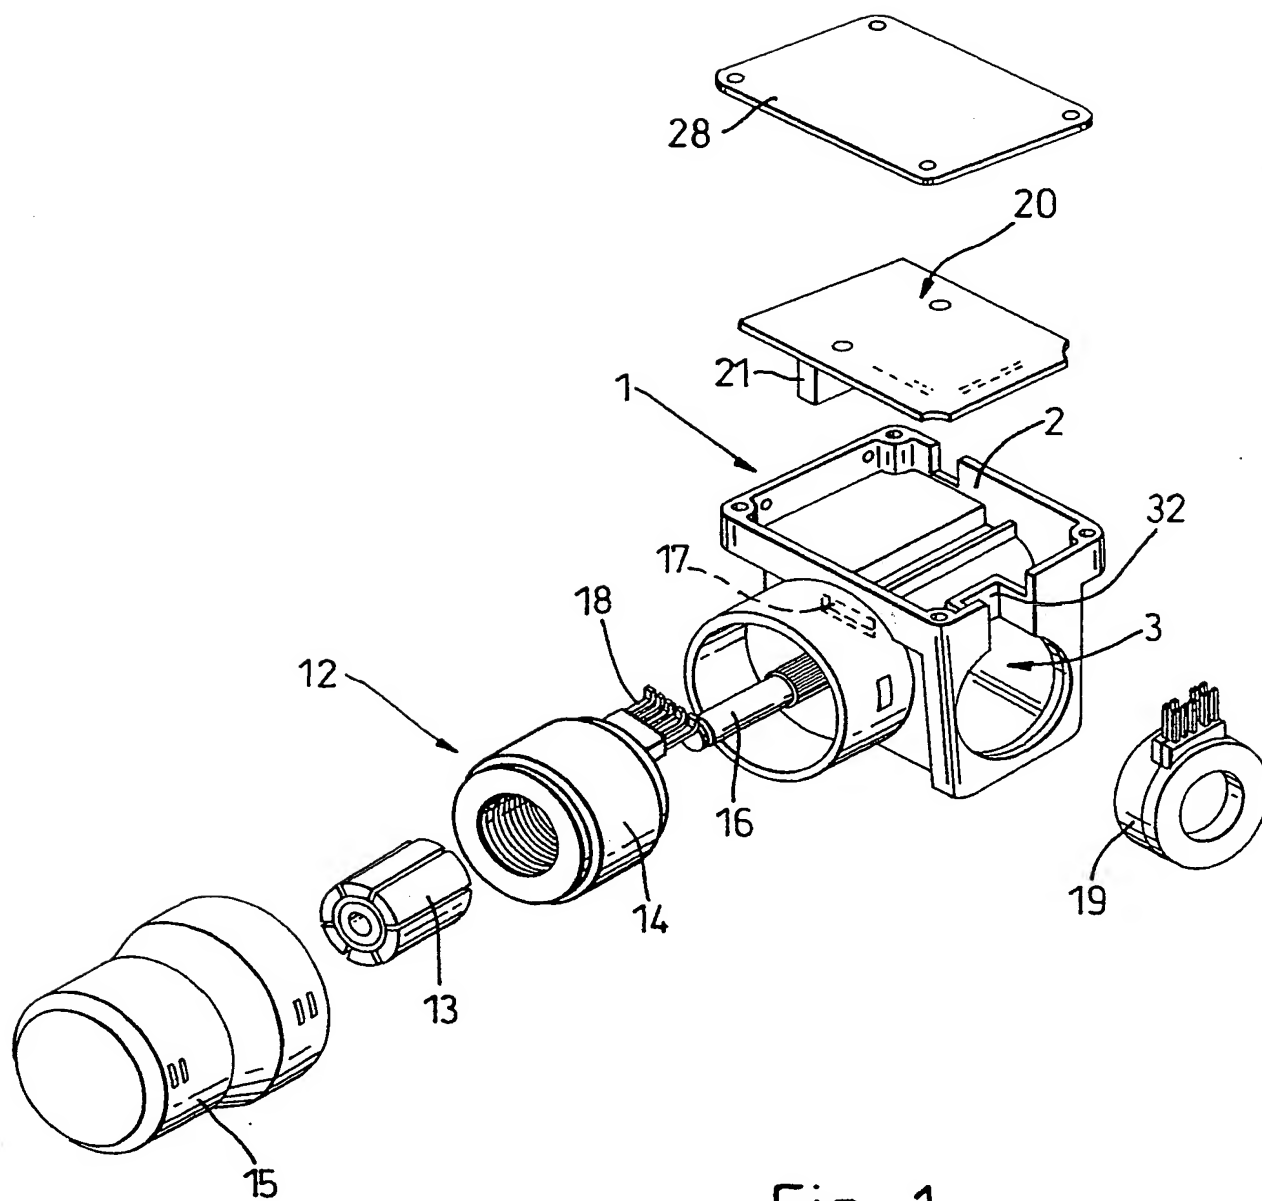


Fig. 1

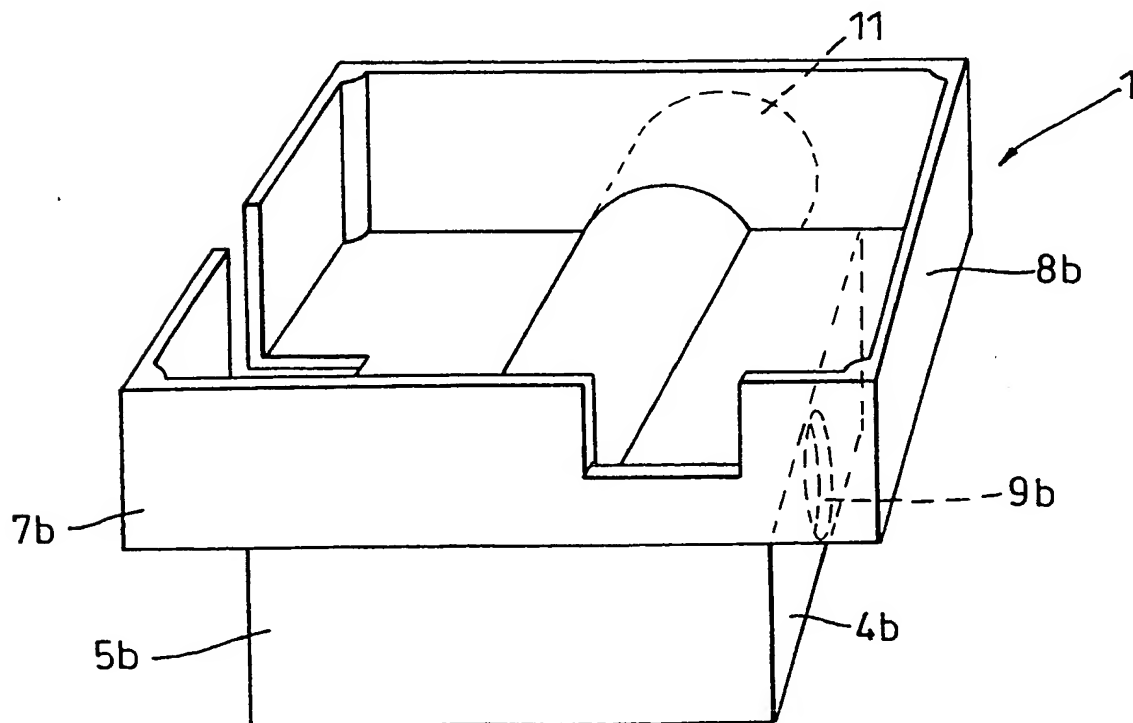

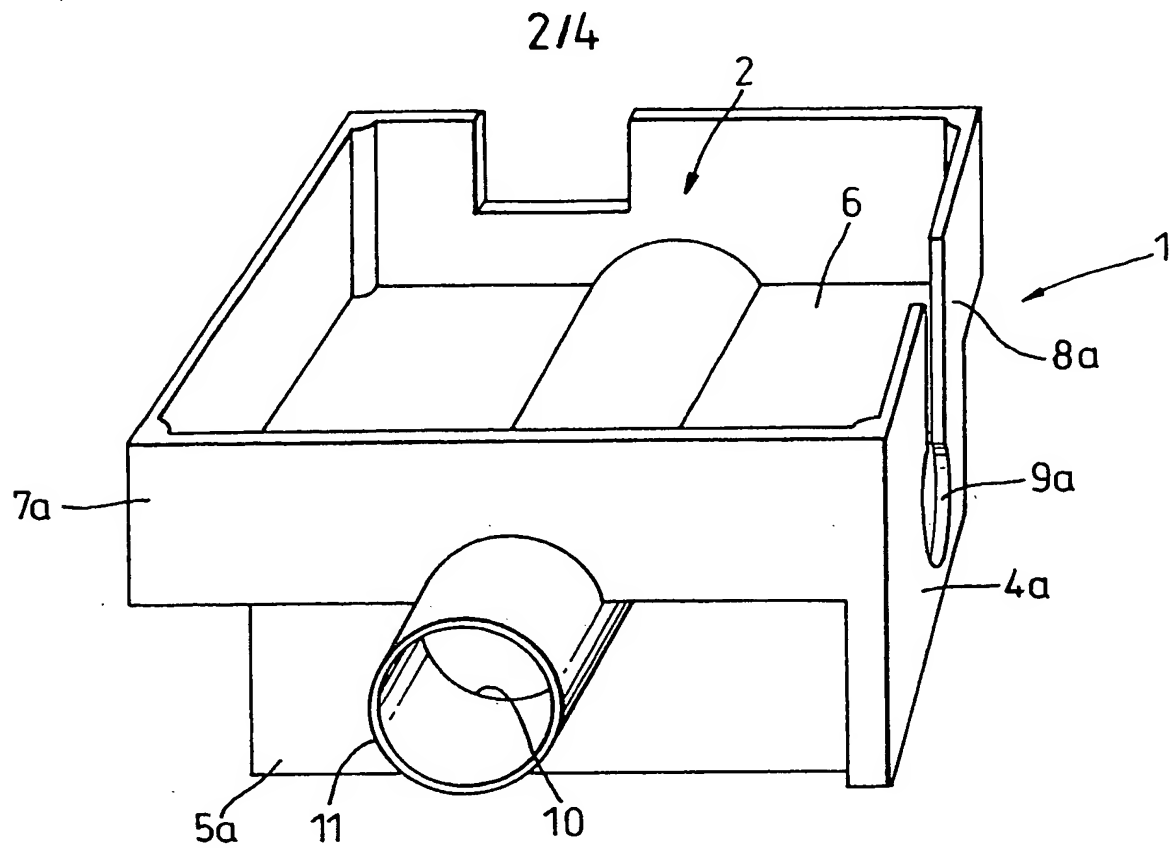

3/4

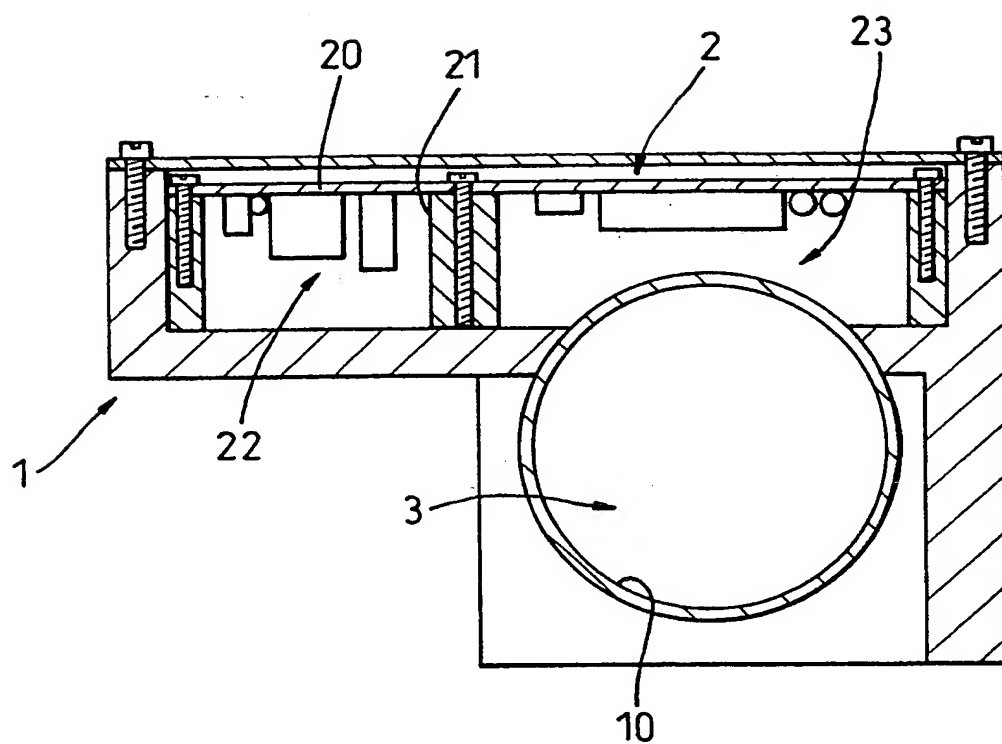


Fig. 4

4/4

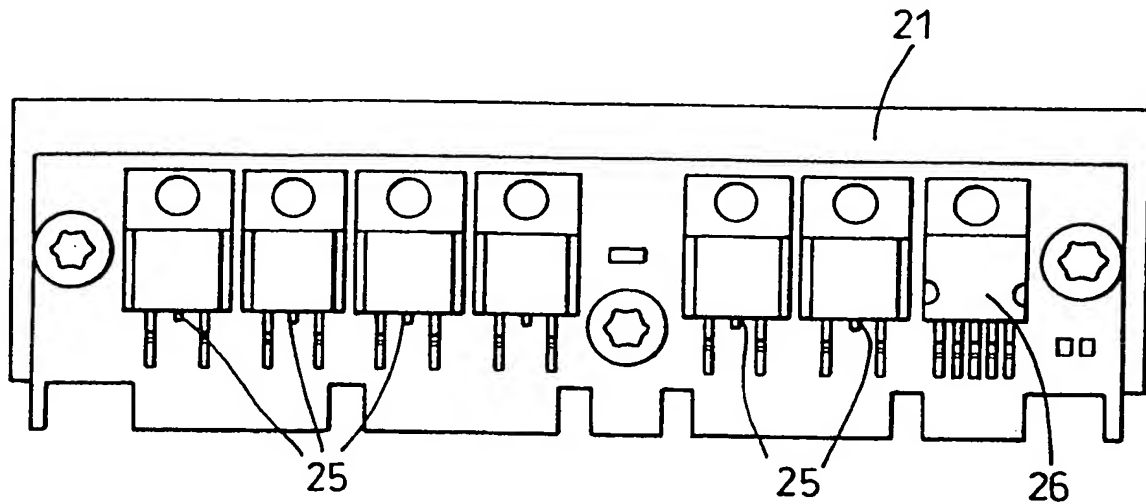


Fig. 5(a)

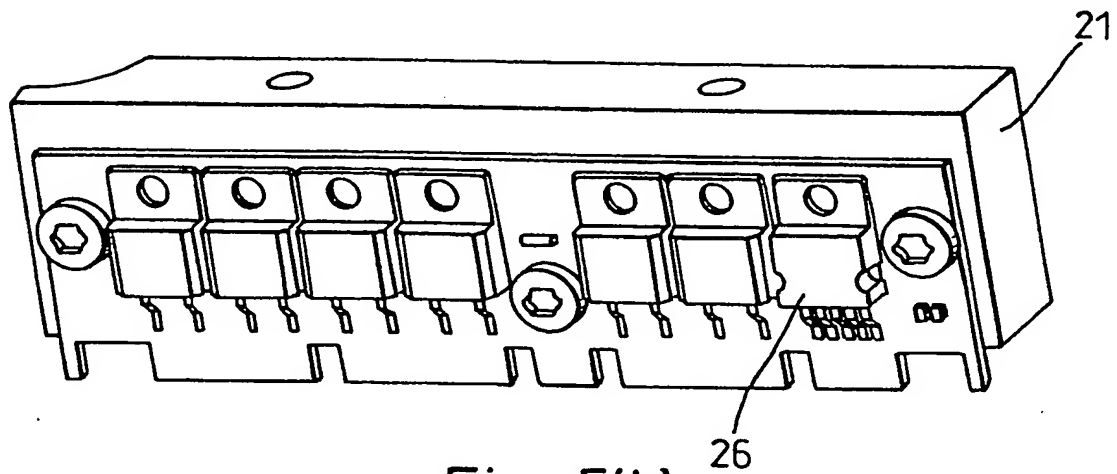


Fig. 5(b)

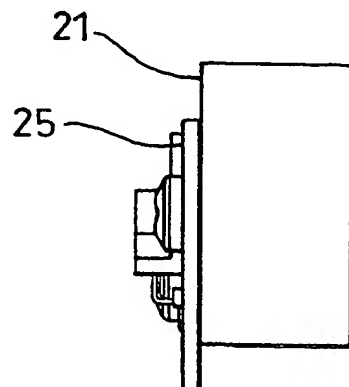


Fig. 5(c)

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 97/03475

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 B62D5/04 H02K11/04

According to International Patent Classification(IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 B62D H02K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CONNOR B: "ELEKTRISCHE LENKHILFEN FUR PKW ALS ALTERNATIVE ZU HYDRAULISCHEN UNDELEKTROHYDRAULISCHEN SYSTEMEN ELECTRIC POWER ASSISTED STEERING - AN ALTERNATIVE TO HYDRAULIC AND ELECTRO-HYDRAULIC SYSTEMS" ATZ AUTOMOBILTECHNISCHE ZEITSCHRIFT, vol. 98, no. 7/08, 1 July 1996, STUTTGART, DE, pages 406-408, 410, XP000599773 see page 407, left-hand column, line 10, paragraph 2; figures 1-3	1,2,11, 12
A		3,10,14
A	DE 44 10 061 A (MITSUBISHI ELECTRIC CORP) 29 September 1994 see column 5, line 46 - column 8, line 52; figures 1A,1B	1,5-7

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

27 March 1998

Date of mailing of the international search report

03/04/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Kulozik, E

...formation on patent family members

PCT/GB 97/03475

Form PCT/ISA/210 (patent family annex) (July 1992)

**THIS PAGE BLANK (USPTO)**